


Regular Type Hoist with Motor-Driven Trolley (FT)



INGEVER ASOCIADOS

www.ingeverasociados.com
Barranquilla - Colombia

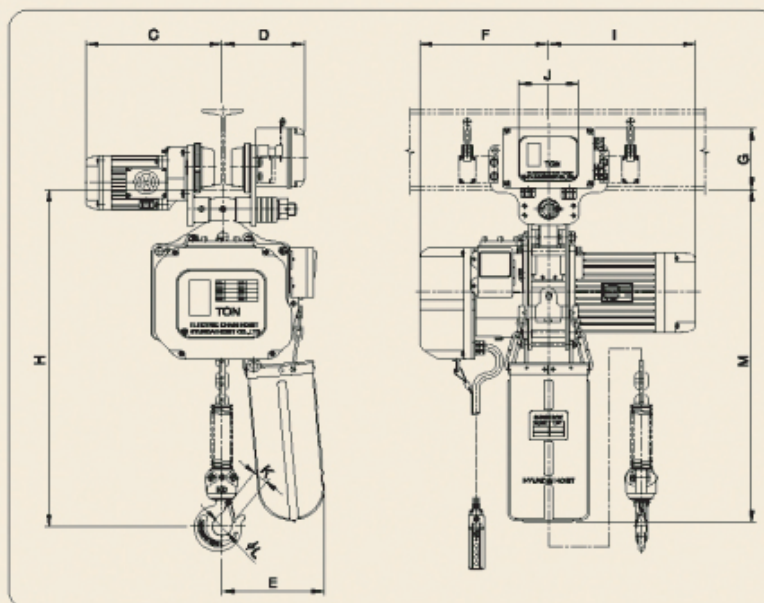

Specifications


Capacity (kg)	Model	Lift (m)	Rating (min)	Hoisting Speed (r/min)		Hoisting Motor (kW)	Traversing Speed (r/min)		Traversing Motor (kW)	Load Chain (dia. × falls)	Net Weight (kg)	Beam Width (mm)	Min Radius (for Curve) (mm)
				50Hz	60Hz		50Hz	60Hz					
1500	FT-S150	4	30	8.6	10.3	3.5	16.6	20	0.25	9.5 × 1	165	100~150	1200
1500	FT-D150			8.6/4.3	10.3/5.15	3.5/1.75	•	•	•	•	170	•	•
2000	FT-S200			6.8	8.2	3.5	•	•	•	•	170	•	•
2000	FT-D200			6.8/3.4	8.2/4.1	3.5/1.75	8.3	10	0.13	11.2 × 1	175	100~150	1200
2500	FT-S250			5.4	6.5	3.5	16.6	20	0.4	•	195	•	•
2500	FT-D250			5.4/2.7	6.5/3.25	3.5/1.75	11	13	0.2	11.2 × 1	200	100~150	1500

Dimensions (mm)

Model	Sym.	C	D	E	F	G	H	I	J	K	L	M
FT-S150		345.5	211.5	248	314	157	674.5	360	145	36	48	831
FT-D150		345.5	211.5	248	314	157	674.5	360	145	36	48	831
FT-S200		345.5	211.5	248	314	157	699.5	360	145	36	48	831
FT-D200		345.5	211.5	248	314	157	699.5	360	145	36	48	831
FT-S250		380	271.5	248	314	157	716.5	360	140	45	58	852
FT-D250		380	271.5	248	314	157	716.5	360	140	45	58	852

Note : 양경 4mts 이상의 모델은 당사로 문의 바랍니다. In Case of lift height over 4mts, please contact us.
상기 치수는 I-250×125×7.5 기준임. The above dimension is as follows. (I-250×125×7.5)

Regular Type Hoist with Motor-Driven Trolley (FT)

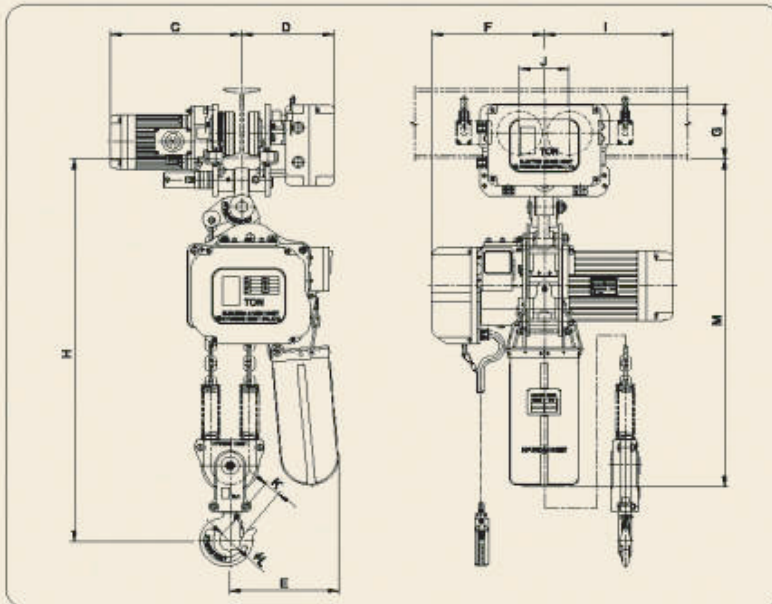

Specifications

Capacity (kg)	Model	Lift (m)	Rating (min)	Hoisting Speed (m/min)		Hoisting Motor (kW)	Traversing Speed (m/min)		Traversing Motor (kW)	Load Chain (dia. × falls)	Net Weight (kg)	Beam Width (mm)	Min Radius (for Curve) (mm)
				50Hz	60Hz		50Hz	60Hz					
3000	FT-S300	4	30	4.3	5.15	3.5	16.6	20	0.4	9.5 × 2	200	100~150	1500
3000	FT-D300			4.3/2.15	5.15/2.58	3.5/1.75	11	13	0.2		205		
5000	FT-S500	3		2.7	3.25	3.5	16.6	20	0.75	11.2 × 2	250	125~175	2000
5000	FT-D500			2.7/1.35	3.25/1.63	3.5/1.75	11	13	0.5		255		

Dimensions (mm)

Model	Sym.	C	D	E	F	G	H	I	J	K	L	M
FT-S300		380	271.5	303	314	157	909.5	360	140	45	58	942
FT-D300		380	271.5	303	314	157	909.5	360	140	45	58	942
FT-S500		399.5	291	312	314	166	1142.5	360	156	50	64	992
FT-D500		399.5	291	312	314	166	1142.5	360	156	50	64	992

Note : 양정 4mts 이상의 모델은 당사코 문의 바랍니다. In Case of lift height over 4mts, please contact us.

상기 치수중 3000kg은 1-250×125×7.5, 5000kg은 1-300×150×10; 기준임. The above dimension is as follows.

1) Capacity 3000kg : 1-250×125×7.5, 2) 5000kg : 1-300×150×10