


Regular Type Hoist with Motor-Driven Trolley (HT)

INGEVER ASOCIADOS

www.ingeverasociados.com
Barranquilla - Colombia

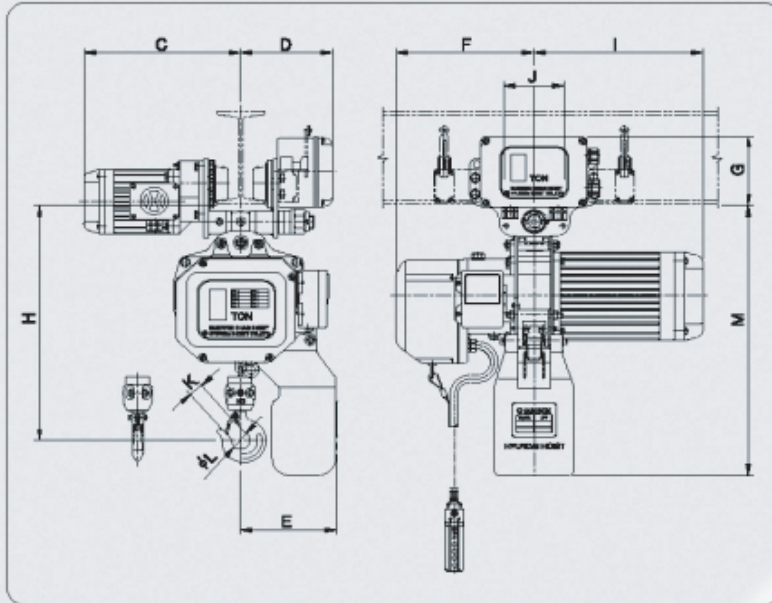

Specifications

Capacity (kg)	Model	Lift (m)	Rating (min)	Hoisting Speed (m/min)		Hoisting Motor (kW)	Traversing Speed (m/min)		Traversing Motor (kW)	Load Chain (dia. × falls)	Net Weight (kg)	Beam Width (mm)	Min Radius for Curve (mm)
				50Hz	60Hz		50Hz	60Hz					
1000	HT-S100	4	30	5.4	6.5	1.5	16.6	20	0.25	7.1 × 1	93	75~125	1100
1000	HT-D100			5.4/2.7	6.5/3.25	1.5/0.75					•		
2000	HT-S200	3		2.7	3.25	1.5	8.3	10	0.13	7.1 × 2	103	100~150	1200
2000	HT-D200			2.7/1.35	3.25/1.63	1.5/0.75					•		

Dimensions (mm)

Model	Sym.	C	D	E	F	G	H	I	J	K	L	M
HT-S100		327.5	193.5	203	289.5	145	423	354.5	127	30	38	583.5
HT-D100		327.5	193.5	203	289.5	145	423	354.5	127	30	38	583.5
HT-S200		345.5	211.5	243	289.5	157	608.5	354.5	145	36	48	690
HT-D200		345.5	211.5	243	289.5	157	608.5	354.5	145	36	48	690

Note : 양정 4mts 이상의 모델은 당사코 문의 바랍니다. In Case of lift height over 4mts, please contact us.

상기 치수중 1000kg은 1-200×100×7t, 2000kg은 1-250×125×7.5t 기준임. The above dimension is as follows.

1)Capacity 1000kg : 1-200×100×7t, 2)2000kg : 1-250×125×7.5t