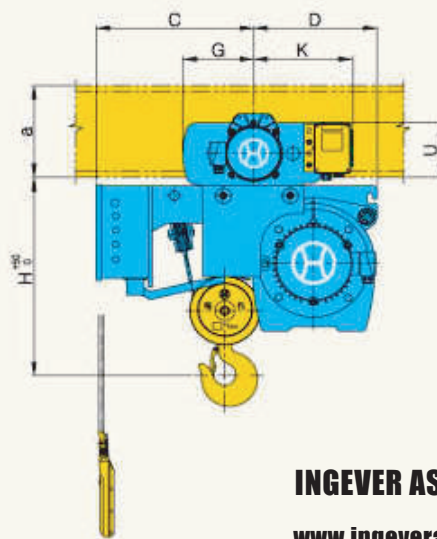
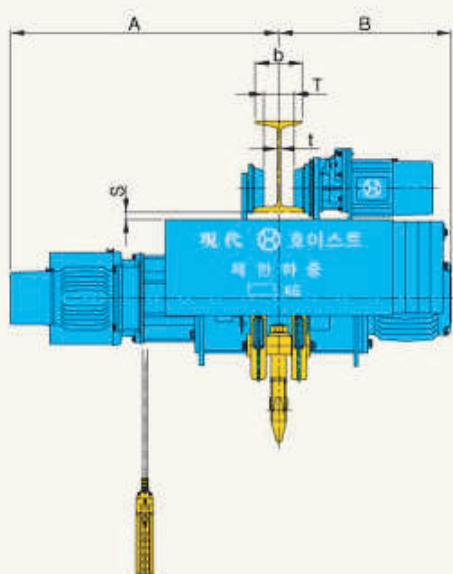


Low-Head Type

Creep Hoist With Motor-Driven Trolley(HR)**INGEVER ASOCIADOS**

www.ingeverasociados.com
Barranquilla - Colombia

Capacity (ton)				1			2			2.8, 3			5		
Host	Lift Height(m)			6			6			6			6		
	Hoisting Speed (m/min)		50Hz	10/1			8.3/0.83			7.5/0.75			4.7/0.47		
	High/Creep		60Hz	12/1.2			10/1			9/0.9			5.6/0.56		
	Hoisting Motor (kW×P)		High/Creep	2.2/0.4×4			3.7/0.4×4			5.5/1.1×4			5.5/1×6		
	Wire Rope		Construction	6×19			6×24			6×37			6×37		
			Dia.(mm)×no.of ropes	6×4			8×4			9×4			12.5×4		
Brake				DC magnet disc											
Traversing	Traversing Speed (m/min)		High	50Hz		20		20		20		20			
			Speed	60Hz		24		24		24		24			
			Low	50Hz		13.3		13.3		13.3		13.3			
			Speed	60Hz		16		16		16		16			
			Dual	50Hz		13.3/6.7		13.3/6.7		13.3/6.7		13.3/6.7			
			Speed	60Hz		16/8		16/8		16/8		16/8			
	Traversing Motor (kW×P)		High Speed	0.75×4		0.75×4		0.75×4		0.75×4					
			Low Speed	0.5×6		0.5×6		0.5×6		0.5×6					
			Dual Speed	0.8/0.4×4/8		0.8/0.4×4/8		0.8/0.4×4/8		0.8/0.4×4/8					
Brake				DC magnet disc											
Dimension (approx.) (mm)		H	480			570			620			760			
		A	688			752			854			936			
		B	479			552.5			548			623			
		C	423			432			504			583			
		D	288			375			393			465			
		G	212			225			225			275			
		K	304			314			314			349			
I-beam and Spacing (mm)		a×b×t	S	T	U	S	T	U	S	T	U	S	T	U	
		200×100×7	35	48	144	35	46	170	35	46	170	—	—	—	
		250×125×7.5	33	73	146	33	71	172	33	71	172	40	60	216	
		300×150×10	27	98	152	27	96	178	27	96	178	34	85	222	
		450×175×13	—	—	—	—	—	—	—	—	—	26	110	230	
Min. radius of curvature(m)				1.5			1.8			1.8			2.3		
Weight (approx.) (kg)				332			498			622			810		

Note : 양청 6mts 이상의 모델은 당사로 문의 바랍니다. In Case of lift height over 6mts, please contact us.